


Active 7" Studio Subwoofer




Packaging



Cardboard box dimensions (HxWxD):
455 x 350 x 415 mm / 17.91" x 13.78" x 16.34"
Total weight:
10.5 kg / 23.15 lb.

Frequency Response

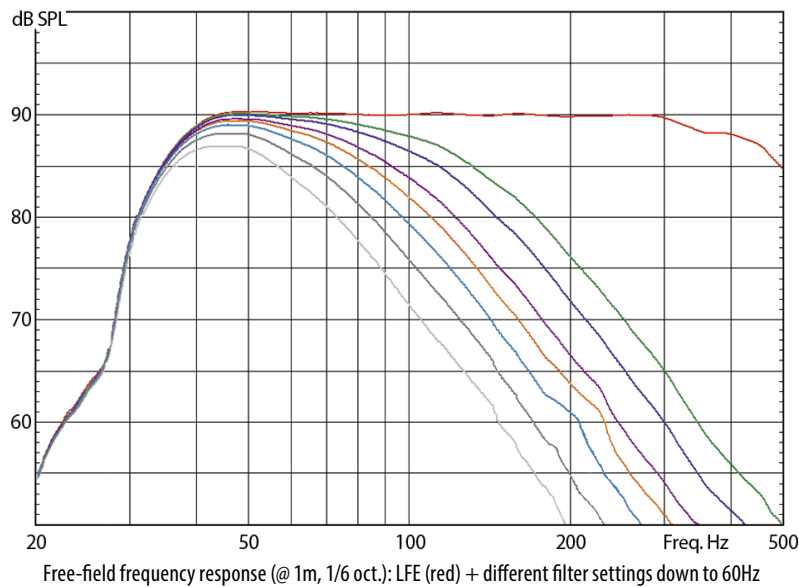

Specification Chart

Dimensions (WxHxD)	230 x 355 x 300 mm	Phase inversion	0°/180°	XLR in right	impedance 10kΩ
Dimensions (WxHxD)	9.06" x 13.98" x 11.81"	Switchable satellite filter	flat/80Hz	XLR in LFE	impedance 10kΩ
Free-field freq. range (-3dB)	36Hz - 300Hz	Variable subwoofer filter	60-140Hz + LFE	XLR out satellite left	impedance 10kΩ
Woofer	165mm/6.5"	LED brightness setting		XLR out satellite right	impedance 10kΩ
Maximum SPL @ 1m	102dB	Level lock dip switch		XLR out (LFE)	impedance 10kΩ
Number of amplifiers	1	Filter lock dip switch		Power consumption	
Output power	100W	Input level dip switch	+7dBu/+22dBu	Standby	< 1W
Protection	Limiter	Auto-standby dip switch		Full output	120VA
User settings		Connectors		Misc.	
System volume (Satellites & Sub)	-inf. - +6dB	RCA in (mono)	impedance 10kΩ	IR remote control	
Subwoofer volume	-inf. - +6dB	XLR in left	impedance 10kΩ	Weight	8.2kg / 18.1lb

Physical Data

