


Active 2-Way Stereo Desktop Speaker Set



Specification Chart


Dimensions (WxHxD)	116 x 190 x 134 mm	User settings		Connectors	
Dimensions (WxHxD)	4.56" x 7.48" x 5.27"	Volume	-inf. - +6dB	Left/right inputs	RCA (imp. 10kΩ)
Free-field freq. range 3dB)	62Hz - 21kHz	High-shelf filter (-5dB - +3dB)	> 3kHz	Digital optical input, 24bit/96kHz	TOSLink
Tweeter	µA.M.T.	Position	flat, desk, console	Class-compliant USB input, 24bit/96kHz	Type B
Mid-Woofer	75mm/3"	Low-shelf filter (-5dB - +3dB)	< 300Hz	Subwoofer output	RCA
Cross-over frequency	4800Hz	LED brightness setting		Power consumption	
Maximum SPL @ 1m	104dBspl	Input select	analog/optical/USB	Standby	< 1W
Number of amplifiers	4	Input level dip switch	+8dBu/+22dBu	Full output	110VA
Output power (woofer)	30W	Standby dip switch	locks cont. mode	Misc.	
Output power (tweeter)	30W	Satellite filter dip switch	80Hz HP filter	Mounting option	SC203 Mounting bracket
Protection	Limiter			Weight (Master)	1.9 kg / 4.19 lb
				Weight (Slave)	1.7 kg / 3.75 lb
				Weight (Flexipad)	0.86kg/0.19lb

Packaging




Cardboard box dimensions (HxWxD):
355 x 230 x 365 mm / 13.98" x 9.05" x 14.37"
Total weight:
5.3 kg / 11.7 lb.

Frequency Response

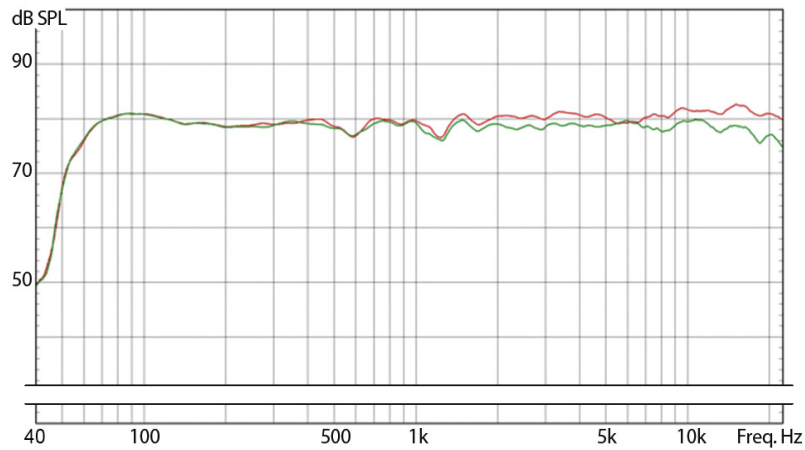


Free-field frequency response (@ 1m, 1/6 oct.): Red = 0° / Green = 30° horizontal off-axis

Horizontal Dispersion

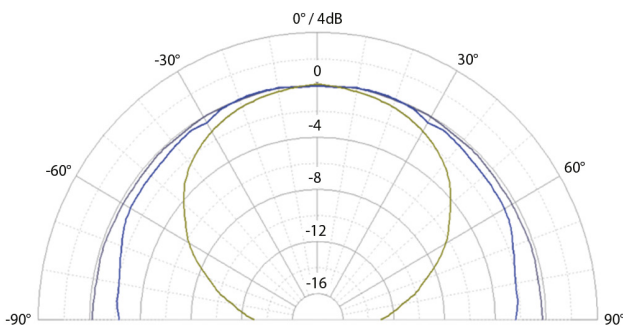


Polar pattern (1m)
Purple = 200Hz / Blue = 1kHz / Yellow = 5kHz

Distortion

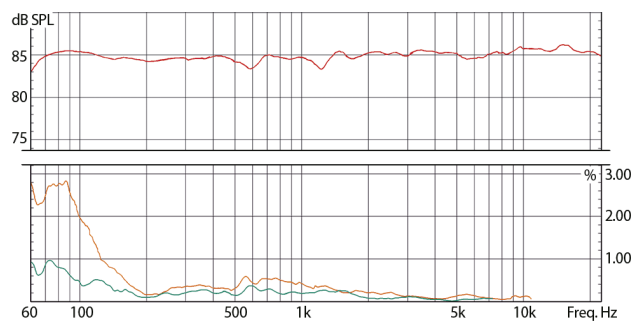


Distortion (@ 1m, full space): 2nd (orange) / 3rd (green)
vs frequency response (red)


Physical Data




Height & width



Depth



Acoustic center



Dispersion measurement plane